

C6N 2MP

Indoor Smart Wi-Fi Pan & Tilt Camera



Image Sensor	1/4" Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Lens	4mm@ F2.4, view angle: 85° diagonal, 75° h 45° v
Lens Mount	M12
Day & Night	IR-cut filter with auto-switching
DNR	3D DNR
WDR	Digital WDR
Video Compression	H.265 / H.264
Video Bit Rate	Adaptive bit rate.
Max. Resolution	1920x1080
Frame Rate	Max. 15fps, Self-adaptive during network transmission
Smart Alarm	Motion detection
Wi-Fi Pairing	AP Pairing
Protocol/Interface Protocol	EZVIZ Cloud Proprietary Protocol
Storage	MicroSD card slot (Max. 256 GB)
Wired Network	RJ45 X 1 (10M/100M self-adaptive Ethernet port)
Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11 Mbps, 11g: 54 Mbps, 11n: 72 Mbps
Power Supply	DC 5V/1A
Power Consumption	5W max
IR Range	MAX. 10m (32.81 fts)

C6N 4MP

Indoor Smart Wi-Fi Pan & Tilt Camera



Image Sensor	F2.2@1/3 Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Lens	4mm view angle: 124°, 85° horizontal, 55° vertical
Lens Mount	M12
Day & Night	IR-cut filter with auto-switching
DNR	3D DNR
WDR	Digital WDR
Video Compression	H.264 / H.265
Video Bit Rate	Adaptive bit rate.
Max. Resolution	2560x1440
Frame Rate	Max. 20fps, Self-adaptive during network transmission
Smart Alarm	Motion detection
Wi-Fi Pairing	AP Pairing
Protocol/Interface Protocol	EZVIZ Cloud Proprietary Protocol
Storage	MicroSD card slot (Max. 256 GB)
Wired Network	RJ45 X 1 (10M/100M self-adaptive Ethernet port)
Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11 Mbps, 11g: 54 Mbps, 11n: 72 Mbps
Power Supply	DC 5V/2A
Power Consumption	5W max
IR Range	MAX. 10m (32.81 fts)

C6 4MP

2K+ Smart Home Camera



Image Sensor	1/3" Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Lens	4 mm @ F1.6, viewing angle: 79° (Horizontal), 42° (Vertical), 92° (Diagonal)
PT Angle	Pan: 353°, Tilt: 133°
Minimum Illumination	0.1 Lux @ (F1.6, AGC ON), 0 Lux with IR
Lens Mount	M12
Day & Night	IR-cut filter with auto switch
DNR	3D DNR
WDR	WDR 80dB
BLC	Supports
Night Vision	10 m
Max Resolution	2560 x 1440
Frame Rate	Max. 25fps, Self-adaptive during network transmission
Video Compression	H.265 / H.264
Video Bit Rate	Ultra-HD; HD; Standard. Adaptive bit rate
Audio Bit Rate	Self-adaptive
Max. Bitrate	4 Mbps
Wi-Fi Standard	IEEE802.11a, 802.11b, 802.11g, 802.11n, 802.11ac
Frequency Range	2.4G: 2400 ~ 2483.5MHz; 5G: 5170 ~ 5250MHz, 5735 ~ 5835MHz
Channel Bandwidth	Support 40MHz
Security	64 / 128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b 11 Mbps, 11g 54 Mbps, 11n HT20 MCS7, 11n HT40 MCS7, 11a 54Mbps, 11n HT20 MCS7, 11n HT40 MCS7
Wi-Fi Pairing	AP pairing
Protocol/Interface Protocol	EZVIZ Cloud Proprietary Protocol
Wired Network	RJ45 x 1 (10M/100M Adaptive Ethernet Port)
Smart Alarm	AI-powered human shape detection / Pet Detection / Waving-Hand Detection / Voice Activity Detection
Customized Alert area	Supports
Two-Way Talk	Supports (Dual-Mic)
General Function	Anti-flicker, dual-stream, heart beat, mirror image, password protection, watermark
Local Storage	MicroSD card slot (Max. 256GB)
Cloud Storage	EZVIZ Cloud Storage
Power Supply	DC 5V / 2A
Power Consumption	Max. 8W

C1C-B

1080P Indoor Wi-Fi Camera



Image Sensor	1/3" Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Minimum Illumination	0.01 lux@ (F2.0 AGC ON), 0 lux with IR
Lens	2.8mm, view angle: 108° (Diagonal), 91° (Horizontal), 50° (Vertical)
Lens Mount	M12
Day and Night	IR-cut filter w/ auto switch
DNR	3D DNR
Night Vision	12m
Video Compression	H.265
Video Bit Rate	Ultra-HD; HD; Hi-Def; fluent. Adaptive bit rate.
Audio Bit Rate	Self-Adaptive
Max. Resolution	1920 x 1080
Frame Rate	Max: 25fps; Self-Adaptive during network transmission
Wi-Fi Pairing	AP Pairing
Protocol/Interface Protocol	EZVIZ Cloud Proprietary Protocol
General Function	Anti-flicker, Dual-Stream, Heart Beat, Password Protection
Max. Bit Rate	1Mbps
Storage	MicroSD card slot (Max. 256 GB)
Wired Network	RJ45 x 1 (10M/100M Adaptive Ethernet Port)
Standard (Wifi)	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Smart Alert	Motion detection
Two-way Talk	Supports
Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 72Mbps
Power Supply	DC 5V/1A
Power Consumption	Max. 3.0W

C8PF 2MP

Dual-Lens Pan & Tilt Wi-Fi Camera




Image Sensor	Dual-1/2.7" Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Lens	2.8 mm @ F1.6 + 12 mm @ F1.6
PT Angle	Pan: 340°, Tilt: 80°
Minimum Illumination	0.05Lux @ (F1.6 AGC ON), 0 Lux with IR
Lens Mount	M12
Day & Night	IR-cut filter with auto-switching
DNR	3D DNR
WDR	Digital WDR
BLC	Supports
Black & White Night	30 m/ 98 ft
Max Resolution	1920 x 1080
Frame Rate	Max. 15fps, self-adaptive during network transmission
Video Compression	H.265 / H.264
H.265 Type	Main Profile
Video Bit Rate	Ultra-HD; HD; Standard. Adaptive bit rate
Audio Bit Rate	Self-adaptive
Max. Bitrate	2 Mbps
Wi-Fi Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11 Mbps, 11g: 54 Mbps, 11n: 72 Mbps
Wi-Fi Pairing	AP pairing
Protocol/Interface Protocol	EZVIZ Cloud Proprietary Protocol
Wired Network	RJ45 x 1 (10M/100M Adaptive Ethernet Port)
Smart Alarm	AI-powered human shape detection
Customized Alert area	Supports
Audio	Supports mic
General Function	Anti-flicker, dual-stream, heart beat, password protection, watermark
Local Storage	MicroSD card slot (Max. 512GB)
Cloud Storage	EZVIZ Cloud Storage
IP Grade	Weatherproof design
Power Supply	DC 12V/1A
Power Consumption	Max. 12W

C8C 2MP

Outdoor Pan & Tilt Camera



Image Sensor	1/2.7" Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Lens	4mm@ F1.6, view angle: 105° diagonal, 87° horizontal 6mm @F1.6, view angle: 66° diagonal, 55° horizontal
PT Angles	Pan: 352° Tilt: 95°
Lens Mount	M12/ Min.Illumination: 0.5 Lux @ (F1.6, AGC ON), 0 Lux with IR
Day & Night	IR-cut filter with auto-switching
DNR	3D DNR
WDR	Digital WDR
Video Compression	Smart H.265 / H.264
Video Bit Rate	Ultra-HD; Hi-Def; Standard. Adaptive bit rate/Audio: Self Adaptive
Max. Resolution	1920 x 1080
Frame Rate	Max. 30fps; Self-adaptive during network transmission
BLC	Support
Smart Alarm	AI Person Detection
Wi-Fi Pairing	AP Pairing
Protocol/Interface Protocol	EZVIZ Cloud Proprietary Protocol
Max. Bitrate	2Mbps
Storage	MicroSD card slot (Max. 256 GB)
Cloud Storage	EZVIZ cloud storage
Wired Network	RJ45 X 1 (10M/100M self-adaptive Ethernet port)
Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11 Mbps, 11g: 54 Mbps, 11n: 72 Mbps
Black and White Light	30m/100ft
Power Supply	DC 5V/1A
Power Consumption	6W max

H8c 2MP

Outdoor Pan & Tilt Wi-Fi Camera

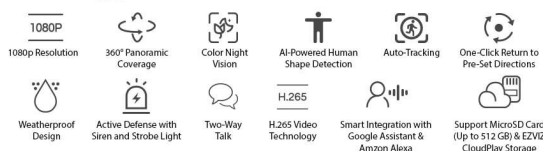


Image Sensor	1/2.7" Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Minimum Illumination	0.5 lux@ (F1.6, AGC ON), 0 lux with IR
Lens	2.8mm @ F2.0, view angle: 122° (Diagonal), 106° (Horizontal)
Lens Mount	M12
DNR	3D DNR
WDR	Digital WDR
Video Compression	H.265 / H.264
Video Bit Rate	Ultra-HD; HD; Standard. Adaptive bit rate.
Max. Resolution	1920 x 1080
Frame Rate	Max: 30fps; Self-Adaptive during network transmission
Wi-Fi Pairing	AP Pairing
Protocol/Interface Protocol	EZVIZ Cloud Proprietary Protocol
Max. Bit Rate	2M
Storage	MicroSD card slot (Max. 512 GB)
Wired Network	RJ45 x 1 (10M/100M Adaptive Ethernet Port)
Standard (Wifi)	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 144Mbps
Power Supply	DC 12V/1A
Power Consumption	Max. 12W
IP Grade	Weatherproof Design
Night Vision Distance	30 meters(98ft)

H8c 4MP

2K+ Outdoor Pan & Tilt Wi-Fi Camera


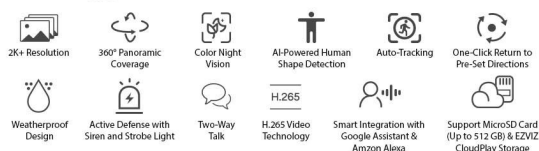


Image Sensor	1/3" Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Minimum Illumination	0.5 lux@ (F1.6, AGC ON), 0 lux with IR
Lens	4mm @ F1.6, viewing angle: 46° (Vertical), 89° (Horizontal), 104° (Diagonal) 6mm @ F1.6, viewing angle: 28° (Vertical), 52° (Horizontal), 60° (Diagonal)
Lens Mount	M12
DNR	3D DNR
WDR	Digital WDR
Video Compression	H.265 / H.264
Video Bit Rate	Quad-HD; Full HD; Hi-Def; Standard. Adaptive bit rate.
Max. Resolution	2560 x 1440
Frame Rate	Max: 30fps; Self-Adaptive during network transmission
Wi-Fi Pairing	AP Pairing
Protocol/Interface Protocol	EZVIZ Cloud Proprietary Protocol
Max. Bit Rate	4M
Storage	MicroSD card slot (Max. 512 GB)
Wired Network	RJ45 x 1 (10M/100M Adaptive Ethernet Port)
Standard (Wifi)	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 72Mbps
Power Supply	DC 12V/1A
Power Consumption	Max. 12W
IP Grade	Weatherproof Design
Night Vision Distance	30 meters(98ft)

C3TN OUTPRO 3MP

Color Night Vision Outdoor Smart Wi-Fi Camera

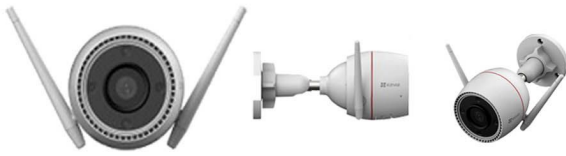

3MP

2K Resolution



AI Powered Human Detection



Color Night Vision

H.265

H.265 Video Compression



Active Light and Sound Defense



IP67 Dust and Water Protection



MicroSD Card for local storage (up to 256 GB)



Two-way Talk

Image Sensor	1/2.7" Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Minimum Illumination	0.01 lux@(F2.0, AGC ON), 0 lux with IR
Lens	2.8mm @ F2.0, view angle: 126°(Diagonal), 109° (Horizontal)
Lens Mount	M12
DNR	3D DNR
WDR	Digital WDR
Video Compression	H.265 / H.264
Video Bit Rate	Ultra-HD; HD; Standard. Adaptive bit rate.
Max. Resolution	2304x 1296
Frame Rate	Max: 30fps; Self-Adaptive during network transmission
Wi-Fi Pairing	AP Pairing
Protocol/Interface Protocol	EZVIZ Cloud Proprietary Protocol
General Function	Anti-flicker, Dual-Stream, Heart Beat, Password Protection
Max. Bit Rate	2M
Storage	MicroSD card slot (Max. 256 GB)
Wired Network	RJ45 x 1(10M/100M Adaptive Ethernet Port)
Standard(Wifi)	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 144Mbps
Power Supply	DC 12V/1A
Power Consumption	Max. 6W
IP Grade	IP67
B/W Night Vision Distance	Max. 30 meters(98ft)

C3TN 2MP

Outdoor Smart Wi-Fi Camera



Night Vision



Motion Detection

FHD

1080p

H.265

H.265 Video Compression



Audio Recording



IP67 Dust and Water Protection



MicroSD Card for local storage (up to 256 GB)




Secure Cloud Storage (Optional)

Image Sensor	1/2.7" Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Minimum Illumination	0.01 lux@(F2.0, AGC ON), 0 lux with IR
Lens	2.8mm @ F2.0, view angle: 122°(Diagonal), 106° (Horizontal)
Lens Mount	M12
DNR	3D DNR
WDR	Digital WDR
Video Compression	H.265 / H.264
Video Bit Rate	Ultra-HD; HD; Standard. Adaptive bit rate.
Max. Resolution	1920 x 1080
Frame Rate	Max: 30fps; Self-Adaptive during network transmission
Wi-Fi Pairing	AP Pairing
Protocol/Interface Protocol	EZVIZ Cloud Proprietary Protocol
Max. Bit Rate	2M
Storage	MicroSD card slot (Max. 256 GB)
Wired Network	RJ45 x 1(10M/100M Adaptive Ethernet Port)
Standard(Wifi)	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 144Mbps
Power Supply	DC 12V/1A
Power Consumption	Max. 6W
IP Grade	IP67
Night Vision Distance	Max. 30 meters(98.43ft)

C3N 2MP

Color Night Vision Outdoor Smart Wi-Fi Camera

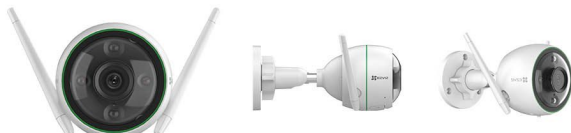

Color Night Vision



AI-Powered Person Detection

FHD

1080p

H.265

H.265 Video Compression



Wi-Fi 2.4 GHz W/ Dual External Antennas



IP67 Dust and Water Protection



Supports MicroSD Card (up to 256 GB)

Image Sensor	1/2.7" Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Lens	2.8mm @ F2.0, view angle: 125°(Diagonal), 104° (Horizontal) 4mm @ F2.0, view angle: 102°(Diagonal), 86° (Horizontal)
Lens Mount	M12
Day & Night	IR-cut filter with auto-switching
DNR	3D DNR
WDR	Digital WDR
Video Compression	H.265 / H.264
Video Bit Rate	Ultra-HD; HD; Standard. Adaptive bit rate.
Max. Resolution	1920 x 1080
Frame Rate	Max: 30fps; Self-Adaptive during network transmission
BLC	Supports
Smart Alarm	AI Powered Human Detection
Wi-Fi Pairing	AP Pairing
Protocol/Interface Protocol	EZVIZ Cloud Proprietary Protocol
Max. Bit Rate	2Mbps
Storage	MicroSD card slot (Max. 256 GB)
Wired Network	RJ45 x 1(10M/100M Adaptive Ethernet Port)
Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 144Mbps
Power Supply	DC 12V/1A
Power Consumption	Max. 7W
IP Grade	IP67
Night Vision Distance	Max. 30 meters(98.43ft)
Audio Reception	Max. 5m

BC2 2MP

Wi-Fi Smart Home Battery Camera



FHD

1080p Resolution



IR Night Vision Up to 5m (16 ft)



Smart Human Motion Detection



Two-Way Talk



Up to 50 Days of Battery Life (2,000 mAh Rechargeable Battery)



Palm-Sized Camera



Install with Magnetic Base



Smart Integration with Google Assistant & Amazon Alexa



Supports MicroSD Card (Up to 256 GB)

Image Sensor	1/2.8" 2-Megapixel Progressive Scan CMOS Sensor
Shutter Speed	Self-adaptive shutter
Lens	4 mm @ F1.6, view angle: 100° 85° (Diagonal), 46° (Horizontal)
Night Vision	Max. 5 m / 16 ft
Minimum Illumination	0.1 Lux
Lens Mount	M12
Day & Night	IR-cut filter with auto switch
DNR	3D DNR
Max Resolution	1920 x 1080
Frame Rate	15fps. Self-adaptive during network transmission
Video Compression	H.265 / H.264
Video Bit Rate	Ultra-HD; HD; Standard. Adaptive Bit Rate.
Audio Bit Rate	Self-adaptive
Max. Bitrate	1 Mbps
Wi-Fi Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20 MHz
Security	64 / 128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 150Mbps
Wi-Fi Pairing	AP pairing
Protocol/Interface Protocol	EZVIZ Cloud Proprietary Protocol
Wired Network	Not Supports
Minimum Network Requirement	2Mbps
Smart Alarm	Supports
Customized Alert Area	Supports
Two-Way Talk	Supports
Local Storage	MicroSD card slot for local storage (Max. 256 GB)
Cloud Storage	EZVIZ Cloud Storage
Power Supply	DC 5V / 2A (Purchased Separately)
Battery Capacity	2000 mAh

Philippine Distributor

global galaxy
DISTRIBUTION, INC.

20th/FI GlobalBusiness Tower #144 Mayor Ignacio Santos Diaz St., Cubao, Quezon City


For inquiries please call (+632) 8288 9029 / (+632) 8285 5380 / (+632) 3411 4977

email: marketing.ggdi@gmail.com | fb page: ggdi

DB2 3MP

Battery-powered Video Doorbell Kit

NEW

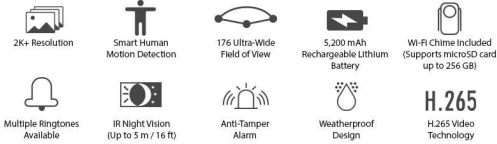

Sensor	1/2.7" Progressive Scan CMOS
Lens	2.0 mm @ F2.0, view angle: 176°(Diagonal)
Day/Night Switch	IR-cut filter with auto-switching
Max. Resolution	2544 x 1888
Video Frame Rate	15Fps
Sensing Angle	100°
Sending Distance	Max. 5m (16.4ft)
Sensitivity	User Adjustable (High, Medium and Low Sensitivity)
Audio Input/Output	Built-in High-sensitivity Microphone/Built-in High power Speaker
Reset Button	Doorbell button, power button, Screen wake up button
Intelligence Alarm	PIR + human shape smart motion detection
Tamper Alarm	Sound and light anti-dismantling alarm
Video Intercom	Long-distance video two way talk
Protocol/Interface Protocol	EZVIZ Cloud Proprietary Protocol
Wi-Fi Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4GHz~2.4835 GHz
Channel Bandwidth	Supports 20MHz
Security	64/128bit WEP/WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b; 11Mbps, 11g; 54Mbps, 11n: 150Mbps
Power Supply	AC 110~240V
Power Consumption	Max. 2W
Storage	Supports microSD card up to 256 GB

DP2C 2MP

Wire-Free Peephole Doorbell



Support Hole Diameter	16.5 to 50 mm (0.65 to 1.97 inch)
Support Door Diameter	35 to 105 mm (1.38 to 4.13 inch)
Sensor	1/3" Progressive Scan CMOS
Lens	2.0 mm @ F2.2, visual angle: 155°(Diagonal)
Day/Night Switch	ICR Infrared filter
IR Distance	Max. 5m
Max. Resolution	1080p/2MP
Video Frame Rate	15Fps
Angle	110°
Distance	Max. 6m (20ft)
Sensitivity	Adjustable
Audio Input/Output	Built-in High-sensitivity Microphone/Built-in High power Speaker
Buttons	Doorbell button, power button, Screen wake up button
Intelligence Alarm	PIR motion detection
Protocol	EZVIZ Cloud Proprietary Protocol
Video Intercom	Local and remote video intercom
General Function	Cloud video encryption and image encryption
Wi-Fi Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4GHz~2.4835GHz
Channel Bandwidth	Supports 20MHz
Security	64/128bit WEP/WPA/WPA2, WPA-PSK/WPA2-PSK, WPS
Transmission Rate	11b; 11Mbps, 11g; 54Mbps, 11n: 150Mbps
Power Supply	DC5V (±%)
Power Consumption	Max. 2.2W

CB3 KIT (w/ Solar Panel)

Standalone Smart Home Battery Camera with Solar Charging Panel


NEW



Image Sensor	1/2.8" 2-Megapixel Progressive Scan CMOS Sensor
Shutter Speed	Self-adaptive shutter
Lens	2.8mm @ F2.0, viewing angle: 128° (Diagonal) 105° (Horizontal), 56° (Vertical)
Night Vision	IR Distance: 15m, Color Night Vision Distance: 15m
Minimum Illumination	0.1 Lux @ (F2.0, AGC ON), 0 Lux with IR
Day & Night	IR-cut filter with auto switch
DNR	3D DNR
Max Resolution	1080p / 2MP, 1920x1080
Frame Rate	Max. 15fps; Self-adaptive during network transmission
Video Compression	H.265 / H.264
Video Bit Rate	Full HD; HI-Def; Adaptive bit rate
Audio Bit Rate	Self-adaptive
Max. Bitrate	1 Mbps
Wi-Fi Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20 MHz
Security	64 / 128-bit WEP/WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b; 11Mbps, 11g; 54Mbps, 11n: 72Mbps
Wi-Fi Pairing	AP pairing
Protocol/Interface Protocol	EZVIZ Cloud Proprietary Protocol
Minimum Network Requirement	2Mbps
Smart Alarm	Smart Human Motion Detection
Two-Way Talk	Supports
Local Storage	Supports microSD card (Up to 256 G)
Cloud Storage	Supports EZVIZ CloudPlay Storage
Power Supply	DC 5V / 2A (Purchased Separately)
Battery Capacity	5200 mAh

LC1C Black & White

Two-in-One Outdoor Security Solution

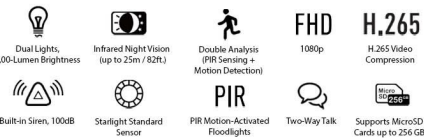

Processor	Embedded High-Performance SOC Processor
Operating System	Embedded Linux
Lamp	2
LED	SMD LED
Brightness	2000LM (+/-10%)
CRI	80
Color Temperature	3000K
Life-Span	@B50L70 @Ta 25°C 25000H
Detection Distance	10 meters (33 feet)
Detection Range	270-degree
Resolution	1920 x 1080
Field of View	Horizontal angle: 103°; Vertical angle: 57°; Diagonal angle: 121°
Night Vision	Up to 25m (82 ft.)
Audio Input	Built-in Omni-direction microphone
Audio Output	Built-in loudspeaker
Audio Quality	Noise suppression
Compression Standard	Smart H.264, H.265
Max. Resolution	1920 x 1080, Full-HD
Frame Rate	25fps, Adaptive frame rate of network transmission
DNR	3D DNR
WDR	Supports
BLC	Supports
Wireless	802.11 b/g/n @2.4GHz only (2T2R, dual-antenna)
Network Configuration	Soft AP Configuration
Local Storage	Supports Micro SD card (up to 256 GB)
Cloud Storage	EZVIZ Cloud Storage
Power Supply	Hardwired (100V ~ 240V)
Power Consumption	≤35W

Philippine Distributor